




QSK60

Marine Propulsion and Auxiliary Engines for Commercial and Recreational Applications

General Specifications

| | |
|--------------------------|----------------------------------|
| Configuration | V-16 cylinder, 4-stroke diesel |
| Aspiration | Turbocharged / Aftercooled |
| Displacement | 60.2 L (3672 in ³) |
| Bore & Stroke | 159 X 190 mm (6.25 X 7.48 in) |
| Rotation | Counterclockwise facing flywheel |
| Fuel System | Modular Common Rail |

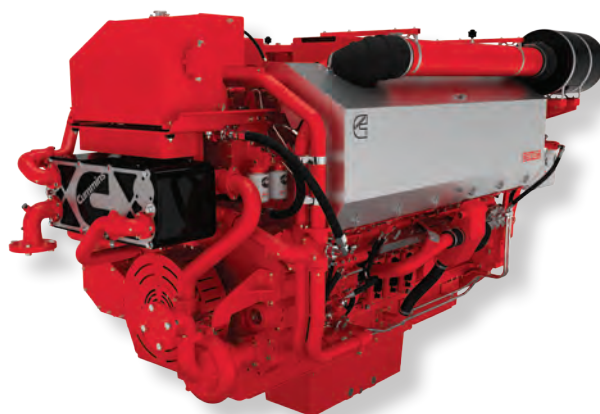

Product Dimensions and Weight

| | | | |
|------------------------|---------|--------|----------|
| Overall Length | mm (in) | 3289.7 | (129.52) |
| Length of Block | mm (in) | 2050.9 | (80.75) |
| Overall Width | mm (in) | 1756.5 | (69.15) |
| Overall Height | mm (in) | 2415.3 | (95.09) |
| Weight | kg (lb) | 8754 | (19,300) |

Dimensions and weight may vary based on selected engine configuration.

Power Ratings


| Engine Model | Output Power | | | Engine Speed RPM | Rating Definition | Fuel Consumption | | Emissions | | | |
|-----------------------|--------------|------|------|------------------|-------------------|---------------------------|--------------------|-----------|-----|----|-----|
| | kW | MHP | BHP | | | Rated Speed L/hr (gal/hr) | ISO* L/hr (gal/hr) | IMO | EPA | EU | RCD |
| Variable Speed | | | | | | | | | | | |
| QSK60-M | 1491 | 2028 | 2000 | 1600 | Continuous | 361.2 (95.4) | 255.6 (67.5) | 2 | - | 3a | - |
| QSK60-M | 1491 | 2028 | 2000 | 1600 | Continuous | 371.2 (98.1) | 266.2 (70.3) | 2 | - | - | - |
| QSK60-M | 1491 | 2028 | 2000 | 1800 | Continuous | 376.8 (99.5) | 257.5 (68.0) | 2 | - | 3a | - |
| QSK60-M | 1641 | 2231 | 2200 | 1800 | Continuous | 404.4 (106.8) | 280.8 (74.2) | 2 | - | 3a | - |
| QSK60-M | 1641 | 2231 | 2200 | 1800 | Continuous | 428.7 (113.3) | 293.5 (77.5) | 2 | - | - | - |
| QSK60-M | 1715 | 2332 | 2300 | 1900 | Heavy Duty | 434.4 (114.8) | 296.3 (78.3) | 2 | - | 3a | - |
| QSK60-M | 1864 | 2535 | 2500 | 1900 | Medium Continuous | 462.2 (122.1) | 322.6 (85.2) | 2 | - | 3a | - |
| QSK60-M | 1864** | 2535 | 2500 | 1800 | Medium Continuous | 463.2 (122.4) | 314.6 (83.1) | 2 | - | - | - |
| QSK60-M | 1998 | 2718 | 2680 | 1900 | Intermittent | 521.9 (137.9) | 358.9 (94.8) | 2 | - | - | - |
| QSK60-M | 2001** | 2721 | 2683 | 1800 | Diesel Electric | N/A | N/A | 2 | - | - | - |
| QSK60-M | 2013** | 2738 | 2700 | 1800 | Medium Continuous | 502.3 (132.7) | 339.2 (89.6) | 2 | - | - | - |
| QSK60-M | 2013 | 2738 | 2700 | 1900 | Medium Continuous | 511.4 (135.1) | 348.1 (92.0) | 2 | - | - | - |
| Fixed Speed | | | | | | | | | | | |
| QSK60-DM | 1563 | 2124 | 2095 | 1500 (50 Hz) | Prime Power | 378.1 (99.9) | 192.1 (50.7) | 2 | - | 3a | - |
| QSK60-DM | 1900** | 2583 | 2547 | 1500 (50 Hz) | Prime Power | N/A | N/A | 2 | - | - | - |
| QSK60-DM | 1900** | 2583 | 2547 | 1800 (60 Hz) | Prime Power | 486.3 (128.5) | 239.8 (63.4) | 2 | - | - | - |
| QSK60-DM | 2001** | 2721 | 2683 | 1800 (60 Hz) | Prime Power | N/A | N/A | 2 | - | - | - |

* Average fuel consumption based on ISO 8178 E3 Standard Test Cycle (variable speed models) and ISO 8178 D2 Standard Test Cycle (fixed speed models)

** Contact your local Cummins distributor to discuss product details and availability

QSK60

Marine Propulsion and Auxiliary Engines for Commercial and Recreational Applications

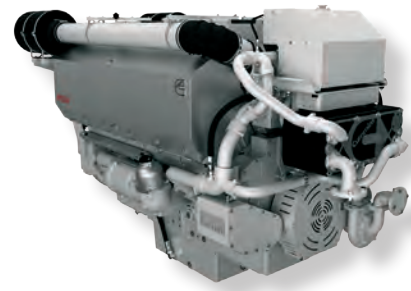

Features and Benefits

Engine Design – Robust engine block designed for continuous duty operation and long life. Metric O-ring seals and edge molded gaskets eliminate fluid leaks. Ductile single-piece iron piston design with hardened liners and nitride coated rings for exceptional durability

Fuel System – Modular Common Rail Fuel System provides constant high injection pressure regardless of engine speed or load condition. Benefits include low noise and vibration for quiet operation, idle stability and improved low-end torque

Cooling System – Low temperature aftercooling. Engine-mounted titanium plate heat exchanger provides superior durability with minimal maintenance requirements

Exhaust System – Dry exhaust manifold with water shielding for reduced fuel consumption and improved performance

Air System – Cummins turbochargers optimized for marine applications. Two pump, two loop, low temperature aftercooling for efficient operation and optimization of performance

Lubrication System – Standard capacity (261 L [69 gal]) or high capacity (378 L [100 gal]) marine grade oil pan. Pre-lube starter protects engine from damage due to dry starts

Electronics – 24v Quantum System electronics feature a proven ECM to monitor operating parameters, while providing diagnostics, prognostics and complete engine protection. Simplified electrical customer interface box for all vessel connections to reduce installation complexity

Certifications – Complies with IMO Tier II and EU Stage IIIa emissions regulations. Designed to meet the International Association of Classification Societies (IACS) and SOLAS requirements. Consult your local Cummins professional for a complete listing of available class approvals

Optional Equipment

- Front power take-off adapter
- Touch screen color remote control panel
- Digital display
- C Command panels
- ELIMINATOR™ oil filtration system
- SAE B accessory drive
- Fully integrated type approved alarm and safety system
- CENTINEL oil management system
- Pre-lube with QuickEvac



Cummins Inc.
4500 Leeds Avenue – Suite 301
Charleston, SC 29405-8539
U.S.A.

Internet: marine.cummins.com

Bulletin 4986143 Rev. 6/16
©2015 Cummins Inc.